
Model leaflet: Cadet Fastroller 360



2

Fair Winds Boat Repairs

134 Riberia Street #7 32084 St. Augustine Tel : 904-669-6045 Fax :

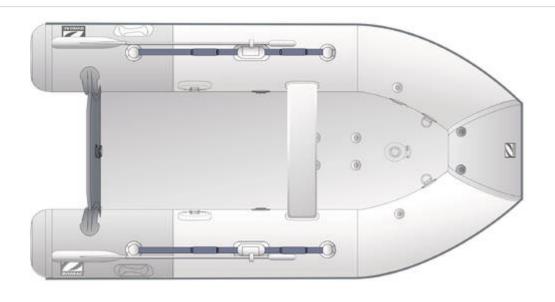

Cadet Fastroller 360

Model Overview:

Compact, boasting unequalled load-capacity, tough yet elegant, the CADET FASTROLLER range represents the very best of tenders. Its Acti-V hull provides improved performance without the need for a more powerful motor. Its anti-drift fins provide excellent control and crisp and accurate handling.

The CADET FASTROLLER comes as standard with a removable quick-mounting thwart, "safe-clic" oarlocks, an internally-operated bailer plus optional flaps that improve handling by enabling the boat to plane quickly but without rearing. Thanks to ZODIAC[™] technology's H2P concept, the boat is quick to assemble and can be easily stowed in a bag. This feature also provides the hull with increased rigidity that significantly improves performance. The bananashaped buoyancy tube gives it an elegant and streamlined look.

Plus Products:

- Superior seating space
- Large diameter half-banana-shaped buoyancy tube: greater stability and safety
- Quick assembly
- Handling and comfort on the water
- Lockable INT-L storage locker
- V-hull
- Rigid inflatable keel

Item code: Fabric: Colour: Floor:

Specifications

Dimensions (m - fi)		Capacity	
Length overall:	3.60 - 11'10"	Passengers (ISO):	6
Inside length:	2.67 - 8'9"	Max payload allowed (B) (kg - lbs):	-
Width overall:	1.74 - 5'9"	Max payload allowed (C) (kg - lbs):	750 - 1653
Inside width:	0.84 - 2'9"	Total weight (kg - lbs):	44 - 97
Tube diametre:	0.45 - 1'6"	Airtight compartments:	3 + 1
Outboard data		Category	
Shaft	Short	European directive	С
Min recommended power (Hp - kW):	6 - 5		
Max recommended power (Hp - kW):	10 - 8		
Max power allowed (Hp - kW):	15 - 12		
Max speed (km/h - mph):	42 - 26		
Hull storage (m - fi)			
Length:	-	Height:	-
Width:	-	Hull angle (°):	-
Folded boat dimensions (m - fi)			
Length of 1st bag:	1.20 - 3'11"	Length of 2nd bag:	-
Width of 1st bag:	0.65 - 2'2"	Width of 2nd bag:	-
Height of 1st bag:	0.40 - 1'4"	Height of 2nd bag:	-

Equipments

Hull	Buoyancy tube
 H2P (high pressure performance) removable inflatable floor 	 Strongan[™] fabric
H2P inflatable keel	 Easy Push valves
Anti-drift fins	 INT-L storage locker
 Aluminium engine mounting plate 	• Handrail
 1 internally-operated bailer 	• 2 oar rests
	 2 "Safe Clic" swivel oarlocks
	 All-round ribbed rubbing strip (width: 125 mm)
	• 1 bow handle
	 2 stainless steel lifting rings
	 2 stainless steel tow rings
	• 2 carrying handles
	Cone reinforcers

Standard Equipment

- "Quick Release" removable thwart (dual position)
- Fuel tank strap
- Reinforced aluminium oars + oarlock with locking ring
- "Modulo" carrying bag
- High pressure foot pump + pressure indicator
- Repair kit
- Owner's manual