




Fair Winds Boat Repairs

134 Riberia Street #7
32084 St. Augustine
Tel : 904-669-6045
Fax :

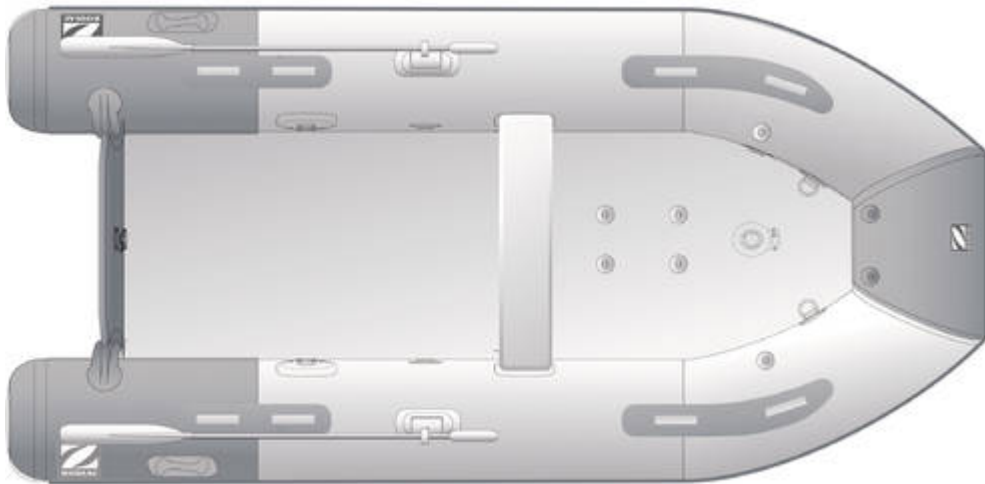

Cadet Fastroller NEO 360

Model Overview:

The CADET FASTROLLER NEO combines all the qualities of the classic CADET FASTROLLER with those of its Hypalon™-Neoprene fabric™.

Its rapidly assembled high pressure inflatable floor and Acti-V hull offer comfortable handling and greatly improve performance of the vessel and its engine. Control is easier thanks to its anti-drift fins.

The elegant and stylish lines of its banana-shaped buoyancy tube, made of Hypalon™-Neoprene™ fabric, offers excellent resistance to extreme conditions (tropical areas, frequent use, etc.). Being more flexible, this boat may be easily folded into its bag.

Plus Products:

- Hypalon™-Neoprene™ fabric
- Superior seating space
- Large diameter half-banana-shaped buoyancy tube: greater stability and safety
- Quick assembly
- Handling and comfort on the water
- V-hull
- Rigid inflatable keel

Item code:

Fabric:

Colour:

Floor: FR

Specifications

Dimensions (m - fi)

Length overall:	3.60 - 11'10"
Inside length:	2.67 - 8'9"
Width overall:	1.74 - 5'9"
Inside width:	0.84 - 2'9"
Tube diametre:	0.45 - 1'6"

Capacity

Passengers (ISO):	6
Max payload allowed (B) (kg - lbs):	-
Max payload allowed (C) (kg - lbs):	750 - 1653
Total weight (kg - lbs):	44 - 97
Airtight compartments:	3 + 1

Outboard data

Shaft	Short
Min recommended power (Hp - kW):	6 - 5
Max recommended power (Hp - kW):	10 - 8
Max power allowed (Hp - kW):	15 - 12
Max speed (km/h - mph):	42 - 26

Category

European directive	C
--------------------	---

Hull storage (m - fi)

Length:	-	Height:	-
Width:	-	Hull angle (°):	-

Folded boat dimensions (m - fi)

Length of 1st bag:	1.20 - 3'11"	Length of 2nd bag:	-
Width of 1st bag:	0.65 - 2'2"	Width of 2nd bag:	-
Height of 1st bag:	0.40 - 1'4"	Height of 2nd bag:	-

Equipments

Hull

- H2P (high pressure performance) removable inflatable floor
- H2P inflatable keel
- Anti-drift fins
- Aluminium engine mounting plate
- 1 internally-operated bailer

Buoyancy tube

- Hypalon™- Neoprene™ fabric
- Easy Push valves
- Handrail with fabric handles
- 2 oar rests
- 2 "Safe Clic" swivel oarlocks
- All-round ribbed rubbing strip (width: 125 mm)
- 1 bow handle
- 2 stainless steel lifting rings
- 2 stainless steel tow rings
- 2 carrying handles
- Cone reinforcers

Standard Equipment

- "Quick Release" removable thwart (dual position)
- Fuel tank strap
- Reinforced aluminium oars + oarlock with locking ring
- "Modulo" carrying bag
- High pressure foot pump + pressure indicator
- Repair kit
- Owner's manual