


**Fair Winds Boat Repairs**

134 Riberia Street #7  
32084 St. Augustine  
Tel : 904-669-6045  
Fax :

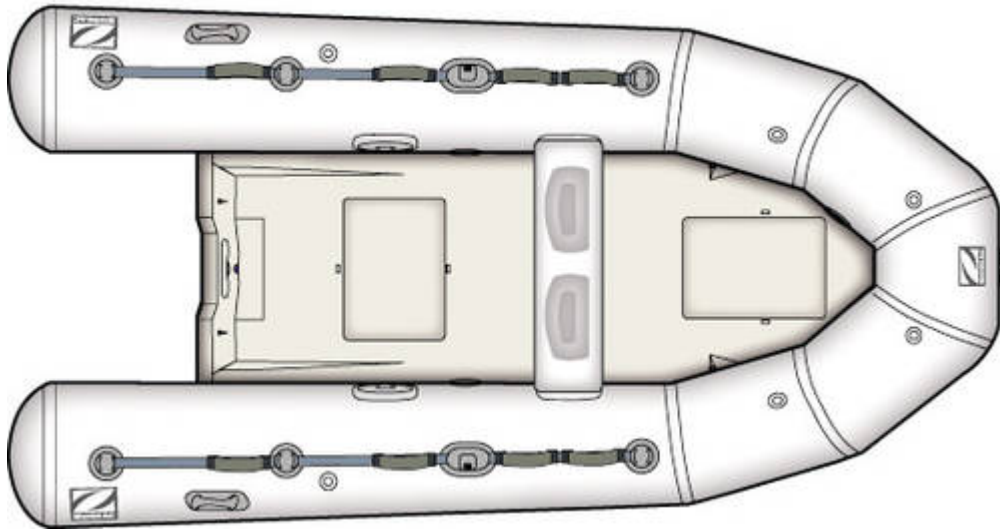

## Cadet RIB 340

**Model Overview:**

The tapering buoyancy tubes, which are wider at the stern, make these RIB tenders better suited to the more reliable and easy to use four-stroke motors. The additional buoyancy associated with a padded\* hull, provides the CADET Rib with an impressive load capacity 50% higher than that for a traditional tender. The wide diameter of its truncated-cone buoyancy tube ensures surprising stability, making it easy to steer, even in choppy seas. Its generous seating, flat deck (enabling a console to be fitted on the 310, 340 and 400 models) as well as the bow storage locker\* make it uniquely comfortable, plus very easy to board and disembark.

\*Only on CADET 310 Rib & 400 Rib

**Plus Products:**

- Progressive diameter buoyancy tubes
- Integrated lifting points
- Moulded non-slip deck
- Excellent performance on the water

Item code:

Fabric:

Colour:

Floor:

## Specifications

### Dimensions (m - fi)

Length overall:	3.40 - 11'2"
Inside length:	2.30 - 7'7"
Width overall:	1.72 - 5'8"
Inside width:	0.80 - 2'7"
Tube diameter:	0.50 - 1'8"

### Capacity

Passengers (ISO):	5
Max payload allowed (B) (kg - lbs):	-
Max payload allowed (C) (kg - lbs):	700 - 1543
Total weight (kg - lbs):	78 - 172
Airtight compartments:	3

### Outboard data

Shaft	Short
Min recommended power (Hp - kW):	15 - 12
Max recommended power (Hp - kW):	25 - 19
Max power allowed (Hp - kW):	25 - 19
Max speed (km/h - mph):	48 - 30

### Category

European directive	C
--------------------	---

### Hull storage (m - fi)

Length:	2.78 - 9'1"	Height:	0.48 - 1'7"
Width:	1.02 - 3'4"	Hull angle (°):	22.0

### Folded boat dimensions (m - fi)

Length of 1st bag:	-	Length of 2nd bag:	-
Width of 1st bag:	-	Width of 2nd bag:	-
Height of 1st bag:	-	Height of 2nd bag:	-

## Equipments

### Hull

- V-shaped polyester hull
- Moulded non-slip deck
- 1 bow D-ring
- 4 integrated lifting points
- Fuel tank securing system
- Aluminium engine mounting plate
- 1 bailer

### Buoyancy tube

- Strongan™ fabric
- Easy Push valves
- Handrail
- 2 Swivel oarlocks
- Broad rubbing strip
- 2 oar rests
- 2 stainless steel tow rings
- 2 carrying handles
- Cone reinforcers

### Standard Equipment

- "Quick Release" upholstered removable thwart (dual position)
- Reinforced aluminium oars + oarlock with locking ring
- Foot pump
- Repair kit
- Owner's manual